
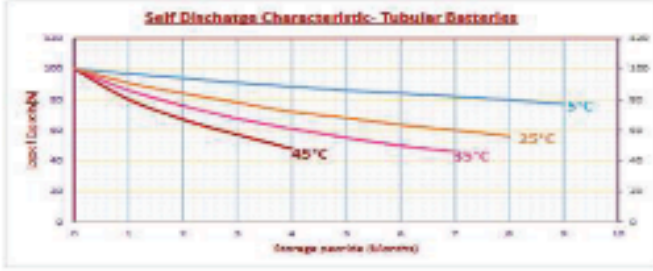
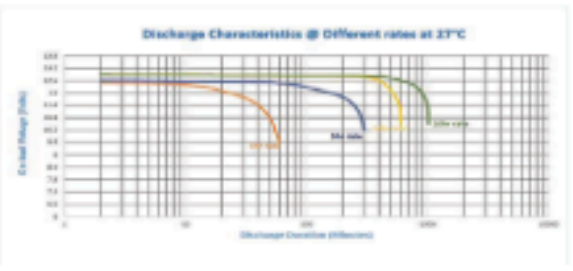
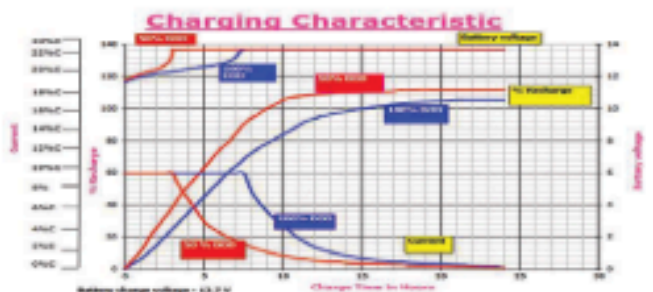


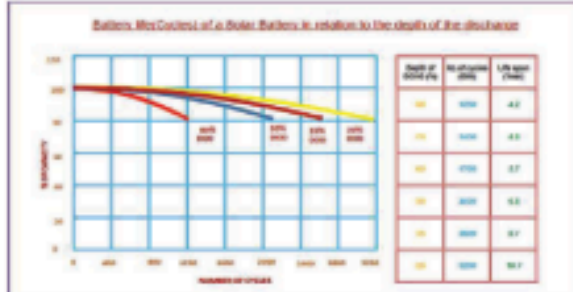

# Tall Tubular Battery

**Model: 12V-200Ah@C10**

- High Acid volume per ampere hour to avoid battery going dry for longer life.
- Robust Tubular with high pressure die-casted spine-resulting low rate of corrosion.
- Latest PE Industrial Sleeve Separator for double life.
- Deep Cycle Design for quick recovery from high depth of discharge.
- Low self-discharge for longer shelf life.
- Resistance to abuse due to deep discharge.
- Very Low maintenance.
- Heavy Duty Terminals suitable for carrying heavy current.
- Made of 99.97% purity which enhances performance.

C10									
Constant-Voltage Charge									
Model	Voltage	Capacity	Maximum Overall Dimension (mm)						
			Length	Width	Height				
XPR-200TT	12V	200 Ah	503	190	406				
Weight (Kg.)			68±3%						
Battery Discharge Table									
End Voltage(V)	Hour (H)								
	1	2	3	4	5	8	10	20	
10.20	110	71.3	53.7	43.1	35.3	25.8	21	12.4	
10.50	105	67.3	50.7	41.1	34.3	24.8	20.5	11.9	
10.80	100	63.3	47.5	39.1	33.3	23.8	20	11.4	
Constant power Discharge data sheet (Watt at 27°C)									
10.20	1328	827	559	538	407	313	268	161	
10.50	1300	792	529	505	398	310	258	153	
10.80	1228	748	496	480	394	309	223	144	
									
									

**HEZI DARYA GENERAL TRADING LTD.**